
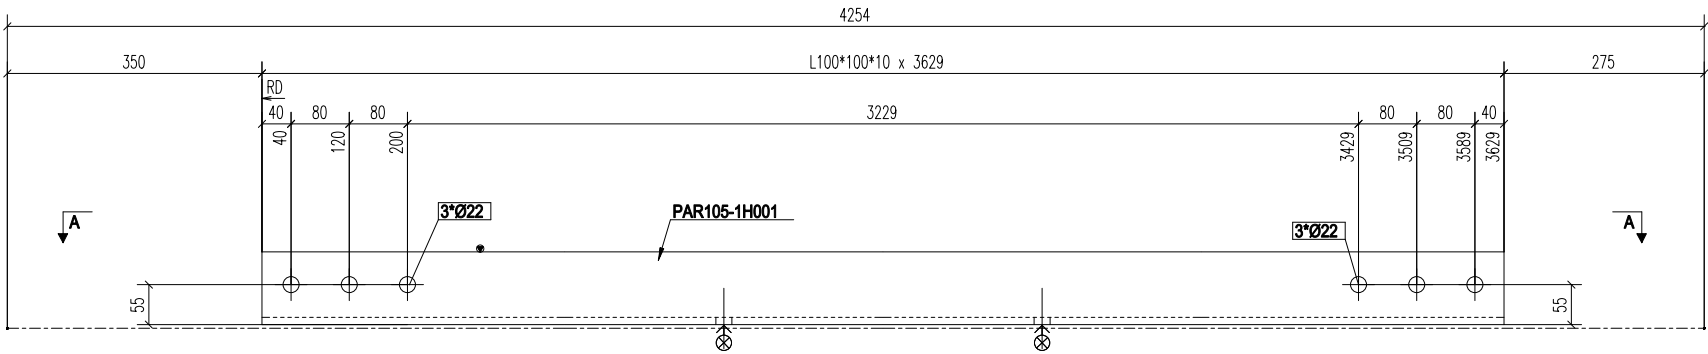


GRID LOCATION		
PAR105-1H001	EL +108.380	23-24/D-C


BILL OF MATERIAL						
MARK	DESCRIPTION	LENGTH	QTY	WT(kg)	MATERIAL	REMARKS
ONE - HOR. BRACE - 861PR001A-PAR105-1H001 - 7						
PAR105-1H001	L100*100*10	3629	1	54.1	A36/A36M	
	TOTAL :			54.1		
	FIELD BOLT					
	M20 H.S.B (1N+1W)	60	6		A325/A325M	GALV.

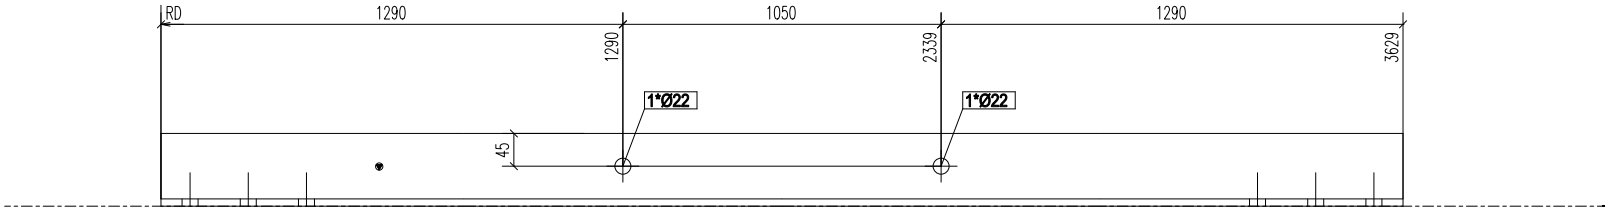

SHOP NOTE

1. ALL DIMENSIONS ARE IN MILLIMETER
2. ALL EDGE DISTANCE (U.N.O): 40mm
3. ALL GALVANIZED (U.N.O.)
4. FIREPROOFING
 - * <F> : TOTALLY ENCASED FIREPROOF MEMBER
 - * (F) : FIREPROOF WITHOUT TOP FLANGE
5. ⦿ DENOTES ASSEMBLY MARK LOCATION
6. ⊗> DENOTES NO PAINT AREA AT CONTACT SURFACE

FILLET WELDING SIZE




TW	S
6 ~ 7	5
8 ~ 9	6
10 ~ 12	8
13 ~ 15	10
16 ~ 20	12
21 ~ 25	14
26 ~ 30	16

FILLET WELD


ONE - HOR. BRACE - 861PR001A-PAR105-1H001 - 7

GRID LOCATION		
PAR105-1H002	EL +108.380	23-24/D-C

BILL OF MATERIAL						
MARK	DESCRIPTION	LENGTH	QTY	WT(kg)	MATERIAL	REMARKS
ONE - HOR. BRACE - 861PR001A-PAR105-1H002 - 7						
PAR105-1H002	L100*100*10	3629	1	54.1	A36/A36M	
	TOTAL :			54.1		
	FIELD BOLT					
	M20 H.S.B (1N+1W)	60	6		A325/A325M	GALV.

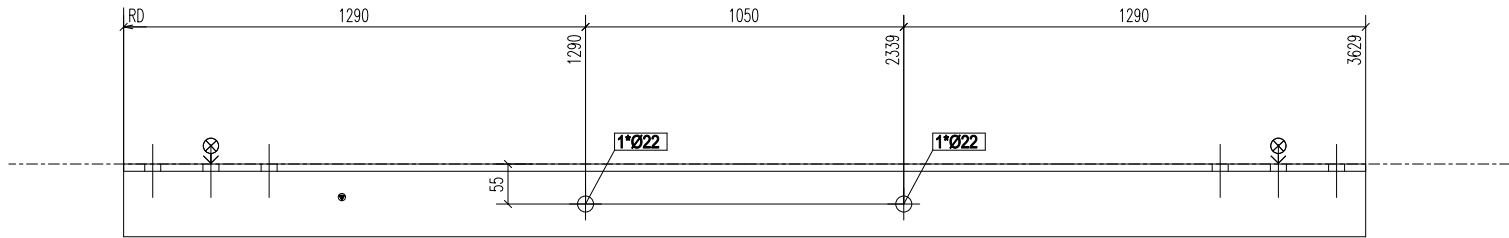

SECT. "A - A"

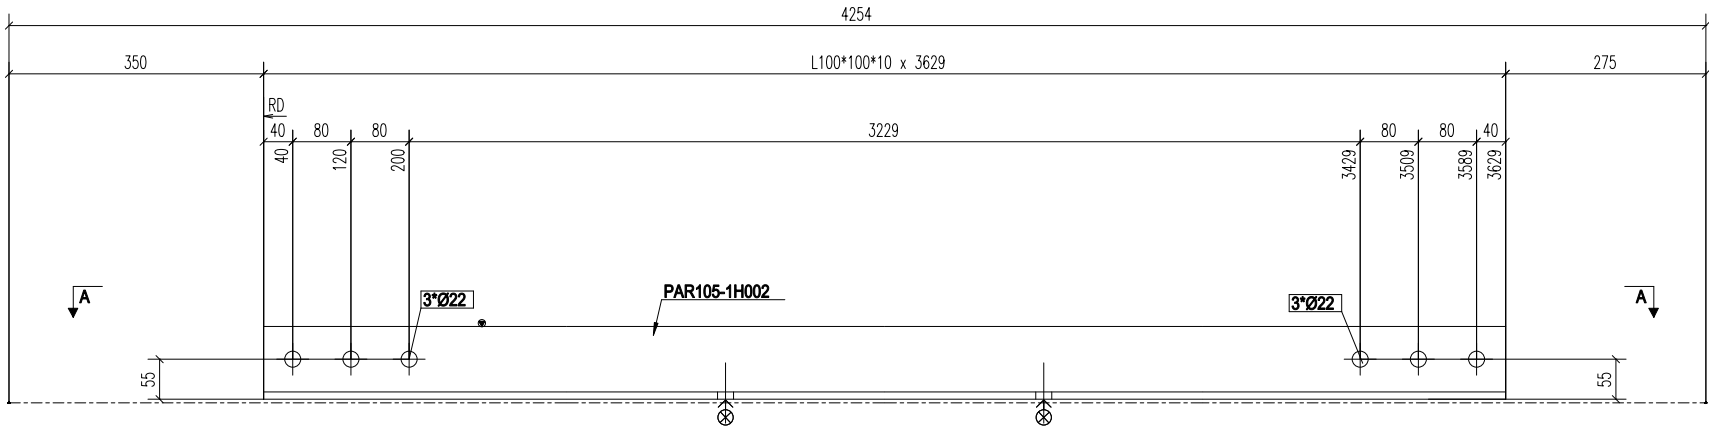

SHOP NOTE


1. ALL DIMENSIONS ARE IN MILLIMETER
2. ALL EDGE DISTANCE (U.N.O): 40mm
3. ALL GALVANIZED (U.N.O.)
4. FIREPROOFING
 - * <F> : TOTALLY ENCASED FIREPROOF MEMBER
 - * (F) : FIREPROOF WITHOUT TOP FLANGE
5. ⦿ DENOTES ASSEMBLY MARK LOCATION
6. ⊗> DENOTES NO PAINT AREA AT CONTACT SURFACE

FILLET WELDING SIZE		A	L.S.Y	K.I.H	FOR APPROVAL
	TW	S			
	6 ~ 7	5			
	8 ~ 9	6			
	10 ~ 12	8			
	13 ~ 15	10			
	16 ~ 20	12			
	21 ~ 25	14			
	26 ~ 30	16			
FILLET WELD					


ONE - HOR. BRACE - 861PR001A-PAR105-1H002 - 7

GRID LOCATION		
PAR105-1H003	EL +108.380	23-24/D-C

BILL OF MATERIAL						
MARK	DESCRIPTION	LENGTH	QTY	WT(kg)	MATERIAL	REMARKS
ONE - HOR. BRACE - 861PR001A-PAR105-1H003 - 7						
PAR105-1H003	L100*100*10	3629	1	54.1	A36/A36M	
	TOTAL :			54.1		
	FIELD BOLT					
	M20 H.S.B (1N+1W)	60	6		A325/A325M	GALV.

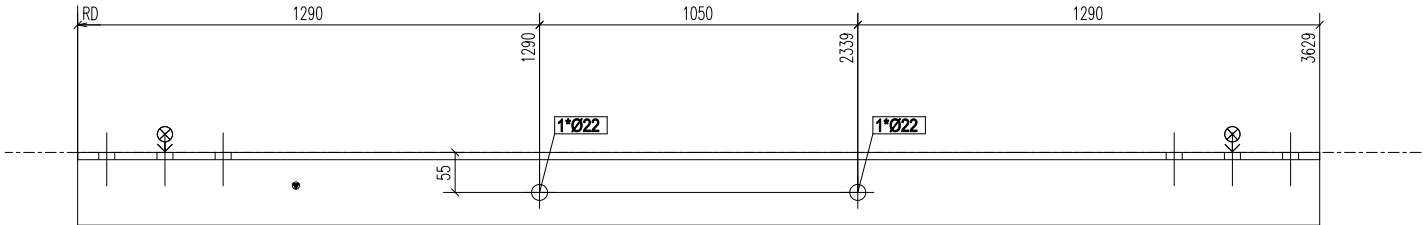


SECT. "A - A "

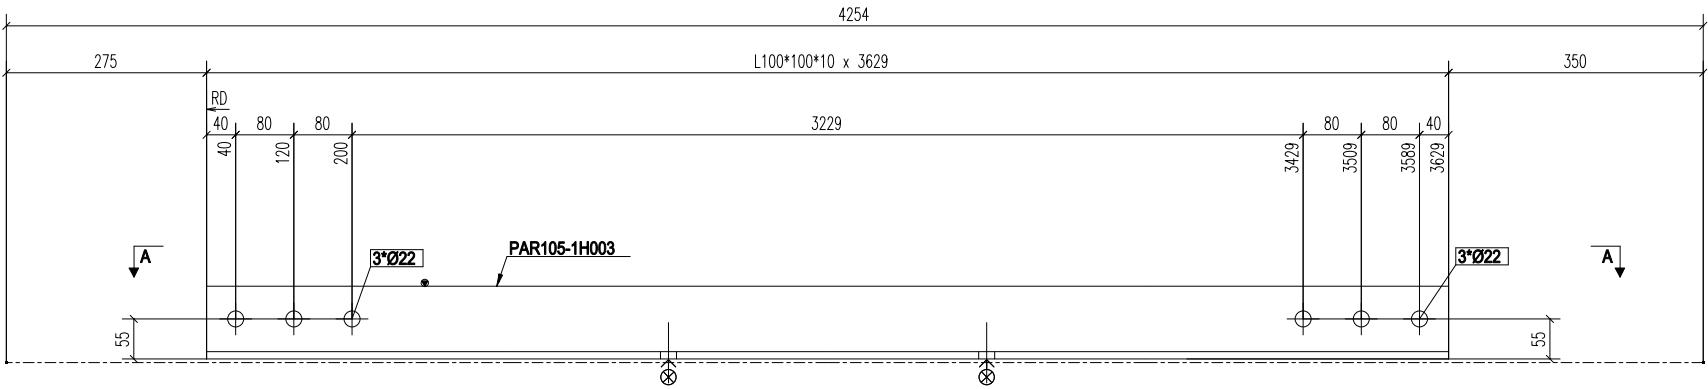

SHOP NOTE

1. ALL DIMENSIONS ARE IN MILLIMETER
2. ALL EDGE DISTANCE (U.N.O): 40mm
3. ALL GALVANIZED (U.N.O.)
4. FIREPROOFING
 - * <F> : TOTALLY ENCASED FIREPROOF MEMBER
 - * (F) : FIREPROOF WITHOUT TOP FLANGE
5. ⊙ DENOTES ASSEMBLY MARK LOCATION
6. ⊗> DENOTES NO PAINT AREA AT CONTACT SURFACE

FILLET WELDING SIZE		A	L.S.Y	K.I.H	FOR APPROVAL
					
TW		S			
6 ~ 7		5			
8 ~ 9		6			
10 ~ 12		8			
13 ~ 15		10			
16 ~ 20		12			
21 ~ 25		14			
26 ~ 30		16			

ONE - HOR. BRACE - 861PR001A-PAR105-1H003 - 7